




776600

Full bore three way flanged PN16 diverter ball valve, zinc-plated A105 carbon steel material, T multi port ball, with 4 seats.



Technical specifications

Drawing

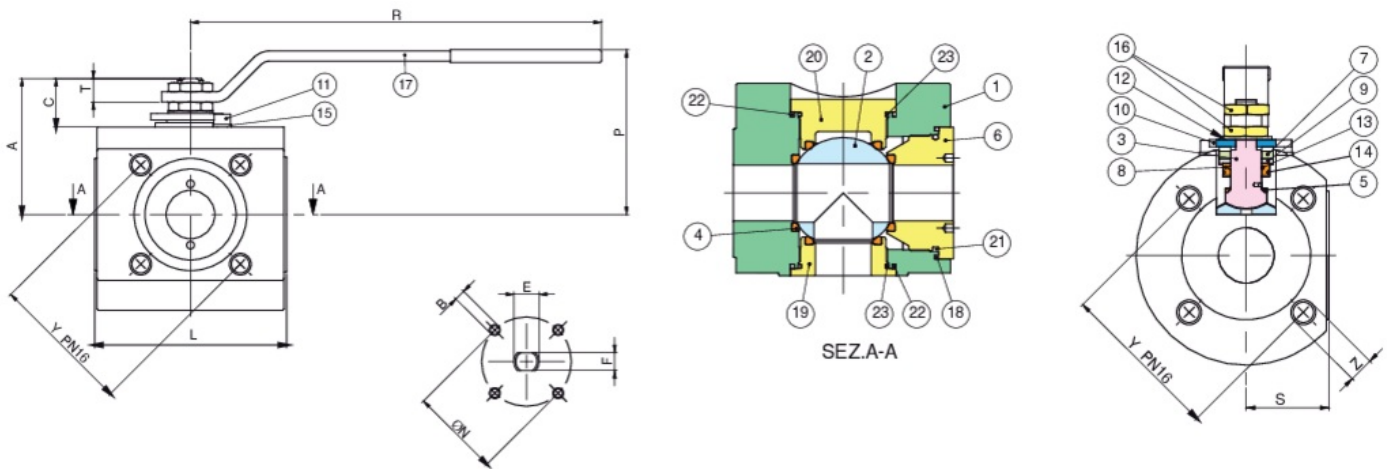

Table

CODE	SIZE	DN	Y	Z	L	S	R	P	A	C	T	E	F	ØN	B	KV(L)	PN	KG
77660004	1/2"	15	65	4	99	35	131.5	73	55	20	10	M10	7	42	4	7.6	16	3.7
77660005	3/4"	20	75	4	108	40	174	90	72	28	13	M12	8	50	4	12.2	16	5.5
77660006	1"	25	85	4	115	41.5	174	95	76	27	12	M12	8	50	4	21.1	16	7
77660007	1 1/4"	32	100	4	140	52.5	250	116	92	31	13	M16	10	50	4	34.6	16	12.5
77660008	1 1/2"	40	110	4	150	56.5	321	129	107	38	18.5	M20	14	70	4	48.8	16	16.5
77660010	2"	50	125	4	167	62	321	137	115	38	18.5	M20	14	70	4	85.1	16	22.5
77660012	2 1/2"	65	145	4	185	85	321	150	131	41	22.5	M20	14	70	4	138.4	16	37
77660014	3"	80	160	8	216	127	381	171	147	40	18	M24	18	102	4	220.1	16	60
77660018	4"	100	180	8	244	150	381	192	169	39	18	M24	18	102	4	381.1	16	95

Notes

Temperature range: -10° +160°

Vacuum: 10⁻³ torr.

Certifications

T.A. LUFT

| ATEX